


# ECM550 NEW

Embedded Thin MicroBox for Low Power Mini-ITX SBC

## Features

- Designed for low power Mini-ITX SBC
- M.2 Key M slot for easy maintenance
- Super thin MicroBox design
- 4 D-Sub connectors
- 2 USB 2.0 and 1 reset button

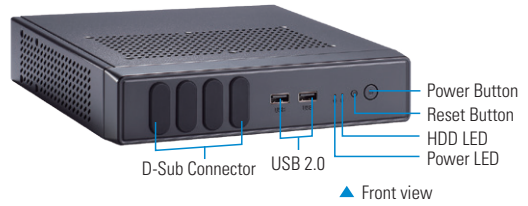

## Specifications

Standard Color	Black	
Construction	Heavy-duty cold-rolled steel	
Indicator	1 x Blue LED for system power-on 1 x Amber LED HDD Active	
Panel I/O	Front	4 x D-Sub connector 1 x Power button 2 x USB 2.0 1 x Reset button
	Rear	1 x Standard Mini-ITX I/O bracket space
Dimensions	204.6 mm (8.05") (D) x 205 mm (8.07") (W) x 45 mm (1.77") (H)	
Environment	EMI pre-scan meets EN55032 Class A	

## Applications

Embedded PC controller  
Compact industrial PC  
POS  
Digital Signage

## Ordering Information

<b>Standard</b>	
E272550100	Embedded Thin MicroBox for Low Power Mini-ITX SBC
<b>SBC optional</b>	
MAN0311/MAN0521	

## Dimensions

