

CEM561 NEW

COM Express Type 6 Compact Module with 12th Gen Intel® Core™ or Celeron® Processor

Features

- 12th gen Intel® Core™ i7/i5/i3 or Celeron® processor (Alder Lake U)
- Dual channel DDR4-3200 SO-DIMM for up to 64GB
- Up to 8 lanes of PCI Express
- 2 SATA Gen3
- 4 USB 3.0 and 8 USB 2.0
- Supports NVMe for up to 512GB (by request)
- Supports TPM 2.0
- Enabler Middleware (eAPI) intelligent remote management software




Core System

CPU	Intel® Core™ i7-1265UE/i5-1245UE/i3-1215UE processor or Intel® Celeron® processor 7305E
System Memory	2 x Dual-channel DDR4-3200 SO-DIMM slot, up to 64GB
Chipset	SoC integrated
BIOS	AMI uEFI (Legacy free)
SSD	NVMe for up to 512GB (optional)
Watchdog Timer	65536 levels, 0 to 65535 sec.
Expansion Interface	1 x PCIe x4 Gen4 + 5 x PCIe Gen3 (NVMe SKUs) 2 x PCIe x4 Gen4 + 5 x PCIe Gen3 (without NVMe SKU) Up to 2 x PCIe x4 Gen4 + 8 x PCIe Gen3 (by request)
Battery Lithium	Yes
Power Input	ATX: +12V, +5VSB AT: +12V
Dimensions	95 x 95 mm
Board Thickness	2.0 mm
Operating Temperature	Wide temperature SKU: -40°C to +85°C (-40°F to +185°F), operation with system thermal solution
Humidity	10% - 95% relative humidity, non-condensing
Vibration Endurance	3.5 Grms

I/O

SATA	2 x SATA Gen3
Hardware Monitoring	Yes
Ethernet	1 x 10/100/1000/2500 Mbps Ethernet with Intel® I226-LM in support of Wake-on-LAN, PXE Boot ROM
Audio	HD link interface to baseboard for Codec
USB	4 x USB 3.0 8 x USB 2.0
Serial	1 x LPC 1 x SPI 2 x TX/RX
TPM	TPM 2.0
SMBus	Yes
Others	1 x I ² C
GPIO	4-CH in & 4-CH out
Smart Battery	Yes

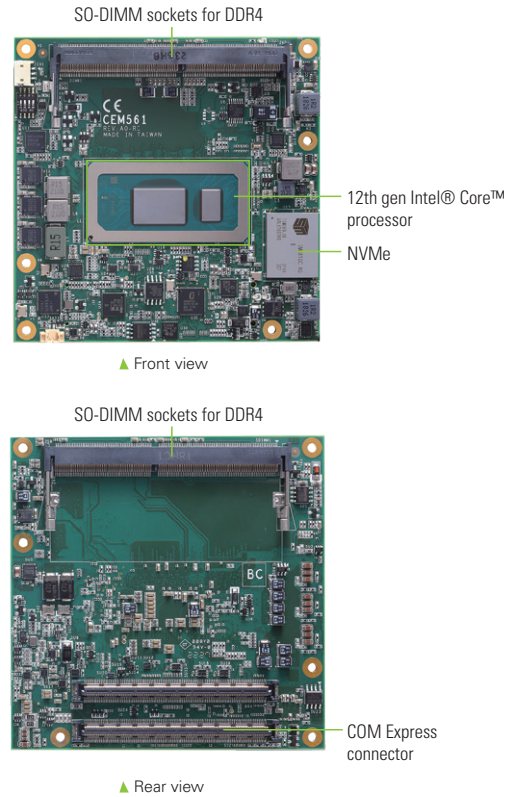

Display

Chipset	Intel® gen 9 Graphics Engine Supports Gfx - DX12.0, OCL2.0, OGL4.3
Display Interface	1 x LVDS; 18/24-bit single/dual channel (optional eDP 1.4b) HBR3: 5120 x 3200@60Hz 1 x VGA; 1920 x 1200 @60Hz (default) 2 x DDI (with up to 8K supported)


Packing List

Quick installation guide

Ordering Information

Standard	
CEM561-i7-1265 (P/N: TBD)	COM Express Type 6 compact module with Intel® Core™ i7-1265UE, DDI, VGA, LVDS, 2.5GbE LAN, 64GB NVMe, and TPM
CEM561-i5-1245 (P/N: TBD)	COM Express Type 6 compact module with Intel® Core™ i5-1245UE, DDI, VGA, LVDS, 2.5GbE LAN, 64GB NVMe, and TPM
CEM561-i3-1215 (P/N: TBD)	COM Express Type 6 compact module with Intel® Core™ i3-1215UE, DDI, VGA, LVDS, 2.5GbE LAN, 64GB NVMe, and TPM
CEM561-Cel-7305 (P/N: TBD)	COM Express Type 6 compact module with Intel® Celeron® 7305E, DDI, VGA, LVDS, 2.5GbE LAN, and TPM
Optional	
CEB94011 (P/N: E394011100)	COM Express Type 6 evaluation board
TBD	CEM561 heat sink with fan
TBD	CEM561 heat spreader

Block Diagram

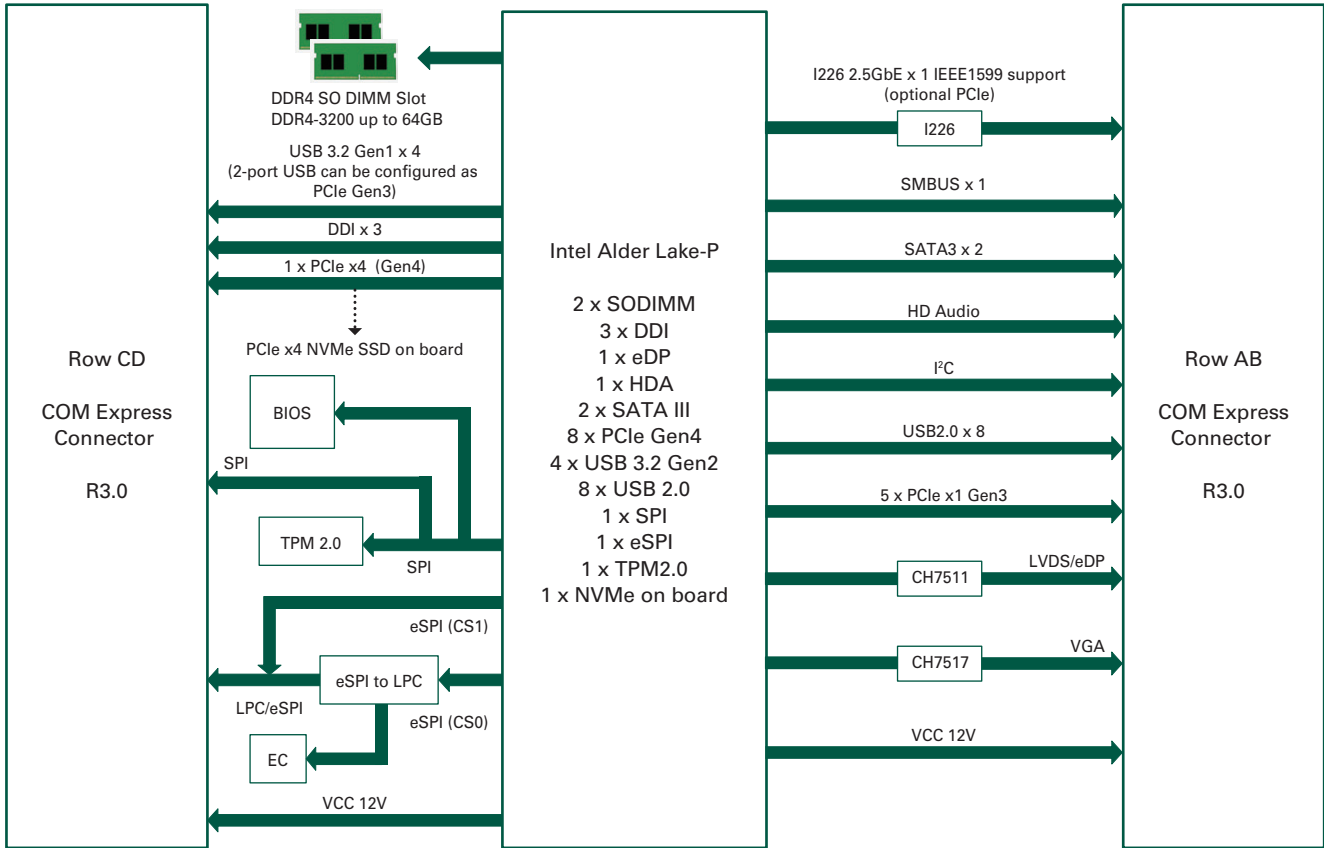

System on Modules

1
2
3
4
5
6
7
8
9
10