




B360 FULLY RUGGED NOTEBOOK

- MIL-STD 810H, 6 feet operating drop rating, IP66 certified, and optional salt fog resistant
- 10th Generation Intel® Core™ Processor
- 13.3" FHD LumiBond® 2.0 Display with Getac Sunlight Readable Technology (1,400 nits) and Capacitive Touchscreen
- Enhanced Enterprise Security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D / 2D Imager Barcode reader and multi-factor authentication options
- LifeSupport™ Battery Swappable Technology



Office Dock

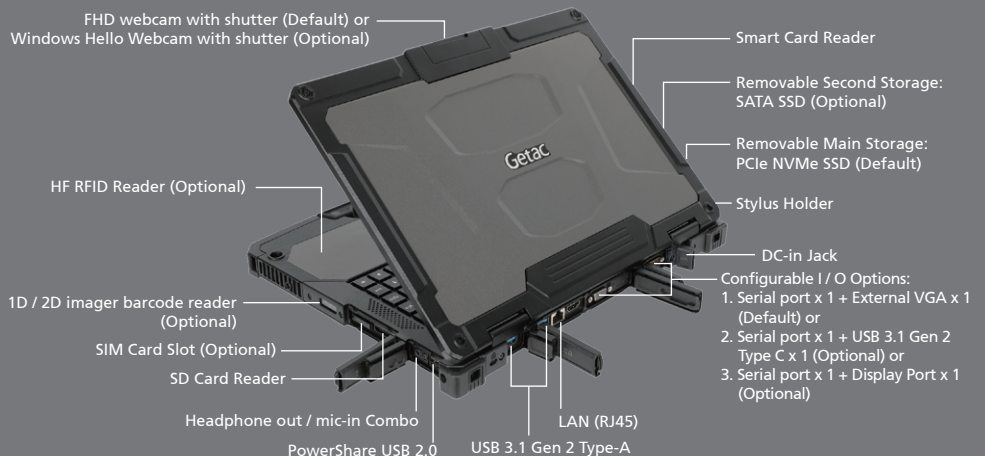

Specifications

Generation

G1

Operating System

Windows 10 Pro

Mobile Computing Platform

Intel® Core™ i5 Technology
Intel® Core™ i5-10210U Processor 1.6GHz
Max. 4.2GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Platform Options:

Intel® Core™ i5 vPro™ Technology
Intel® Core™ i5-10310U, vPro processor 1.7GHz
Max. 4.4GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Intel® Core™ i7 Technology
Intel® Core™ i7-10510U Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7 vPro™ Technology
Intel® Core™ i7-10610U Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7 Technology
Intel® Core™ i7-10710U Processor 1.1GHz
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

13.3" IPS TFT LCD FHD (1920 x 1080)

Protection film

1400 nits LumiBond® display with Getac sunlight

readable technology

Capacitive multi-touch screen

Storage & Memory

8GB DDR4

Optional: 16GB / 32GB / 64GB DDR4

Main Storage(quick-release): 256GB PCIe NVMe SSD

Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2nd Storage: 256GB / 512GB / 1TB / 2TB

SATA SSD

Keyboard

LED backlit membrane keyboard

Optional: LED backlit rubber keyboard

Pointing Device

Touchscreen

- Capacitive multi-touch screen

Touchpad

- Glide touchpad with multi-touch

Expansion Slot

SD Card Reader x 1

Smart Card Reader x 1

Optional: 1D / 2D imager barcode reader

I/O Interface

FHD webcam x 1

Headphone out/mic-in Combo x 1

DC in Jack x 1

PowerShare USB 2.0 x 1

USB 3.1 Gen 2 Type-A x 2

LAN (RJ45) x 1

HDMI x 1

Docking Connector x 1

SD Card Reader x 1

Optional: SIM card slot x 1

Optional: Windows Hello face-authentication camera (front-facing) x 1

Optional: RF antenna pass-through for GPS, WLAN and WWAN

Configurable I/O Options¹:

Serial port (9-pin; D-sub) x 1 + External VGA

(15-pin; D-sub) x 1, or

Serial port (9-pin; D-sub) x 1 + USB 3.1 Gen 2

Type C x 1, or

Serial port (9-pin; D-sub) x 1 + Display Port x 1

Communication Interface

10/100/1000 base-T Ethernet

Intel® Wi-Fi 6 AX200, 802.11ax

Bluetooth (v5.1)²

Optional Dedicated GPS^{3,v}

Optional 4G LTE mobile broadband with

integrated GPS^{3,v}

Security Feature

TPM 2.0

Kensington Lock

Optional: HF RFID reader⁴

Smart Card reader

Power

AC adapter (90W, 100-240VAC, 50 / 60Hz)

Li-Ion battery (11.1V, typical 2100mAh; min.

2040mAh) x 2

LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 34.9 mm (13.46" x 11.06" x 1.37")

2.32 kg (5.11 lbs)⁵

Rugged Feature

MIL-STD-810H certified

IP66 certified

MIL-STD-461G certified⁶

Vibration & 6 feet drop resistant⁶

e-Mark certified for vehicle usage

Optional: ANSI / UL 121201, CSA C22.2 NO. 213

Optional: Salt fog certified

Environmental Specification

Temperature⁷ :

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed Software

Getac Utility

Getac Geolocation

Getac Barcode Manager⁸

Optional: Absolute Persistence⁹

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)

AC Adapter (90W, 100-240VAC)

Capacitive Stylus

Optional:

Backpack

Battery (11.1V, typical 2100mAh; min. 2040mAh)

Multi-bay Charger (Dual Bay)

Multi-Bay Charger (Eight-Bay)

AC Adapter (90W, 100-240VAC)

AC Adapter for Office Dock (120W, 100-240VAC)

MIL-STD-461 Certified AC Adapter (90W,

115-230VAC)

Vehicle Adapter (120W, 11-32VDC)

Capacitive Stylus

Protection Film

Vehicle Dock

Office Dock

Spare SSD Kit

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service

when you least expect it, especially in a rugged

environment, which can cause costly equipment

downtime.

That is why Getac has introduced accidental

damage as standard under our Bumper-to-Bumper

warranty, to help minimize your enterprise IT

costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your

unit back in service within days.

Standard

3 years Bumper-to-Bumper

i Second storage is optional and will be fitted

with a removable cover when not chosen at

point of purchase.

ii External VGA, USB 3.1 Gen 2 Type C and

Display Port are mutually exclusive.

iii Bluetooth performance and connectable

distance may be subject to interference with

the environments and performance on client

devices, users may be able to reduce effects of

interference by minimizing the number of

active Bluetooth wireless devices that is

operating in the area.

iv Dedicated GPS is mutually exclusive with 4G

LTE mobile broadband.

v HF(13.56MHz) Combo HF RFID/NFC reader

(iClass, HID Prox compliant, ISO 15693, 14443

A/B, Mifare, FeliCa™).

vi Weight and dimensions vary from

configurations and optional accessories.

vii MIL-STD-461G 90W AC adapter sold separately.

viii Tested by a national independent third party

test lab following MIL-STD-810H.

ix Available when barcode reader option is selected.

B360

Fully Rugged Notebook



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	--	1
Audio Output	--	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI	1	1
RF Antenna Connector	(GPS, WWAN, WLAN) (optional)	--
Kensington Lock	1	1

Getac

Getac (UK) Ltd.

Getac House, Stafford Park 12,

Telford, Shropshire TF3 3BJ, United Kingdom

Tel : +44 (0) 1952 207 222

Sales-Getac-UK@getac.com | www.getac.com/en/



Copyright © 2020 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request. V01M10Y20UK